



Section A-A

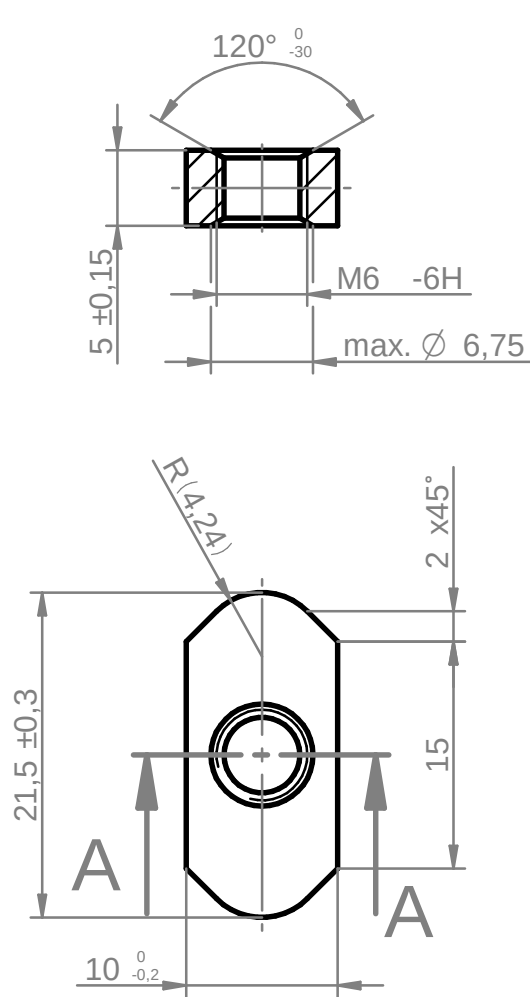

Material: 19MnB4 (1.5523), optional C45

Surface : according VDA 235-104.25
(Fe/ZnNi8/A, transparent passivation, Cr(IV)-free)

Class 10 acc. DIN EN 20898 part 2

Surface protection: min. 504 hours salt-spray test according to DIN EN ISO 9227 NSS without Fe-corrosion

All rough edges to be removed.

This drawing and attached written disclosure, if any, is our intellectual property and must not be used or disclosed to third parties without our explicit consent. All rights reserved. <i>Diese Unterlage ist unser Eigentum und darf ohne unsere Zustimmung nicht verwendet oder an Dritte weitergegeben werden. Alle Rechte vorbehalten.</i> ASA Hydraulik Ges.m.b.H. A-1210 Wien				free size tolerance		surface	scale 2:1		weight 0,007 kg		
				ISO 2768-m			item number(s): MW03693				
					date	name	description Rectangle nut M6 TT rail, Mat. 10				
				drawn	02.06.16	ML					
				check std.	02.06.16	ML					
				review.	02.06.16	MN					
				release	02.06.16	JF					
				 asahydraulik.com			drawing number				page
							A-04742-00				1
											of. pgs.
index	modification	date	name				drawing file: ☐ BC ☐ MC ☐ MTC		update. ERP.:		