


fan kit 0240, 12V / 24V DC

for oil/air blast coolers TT 06, TT 07

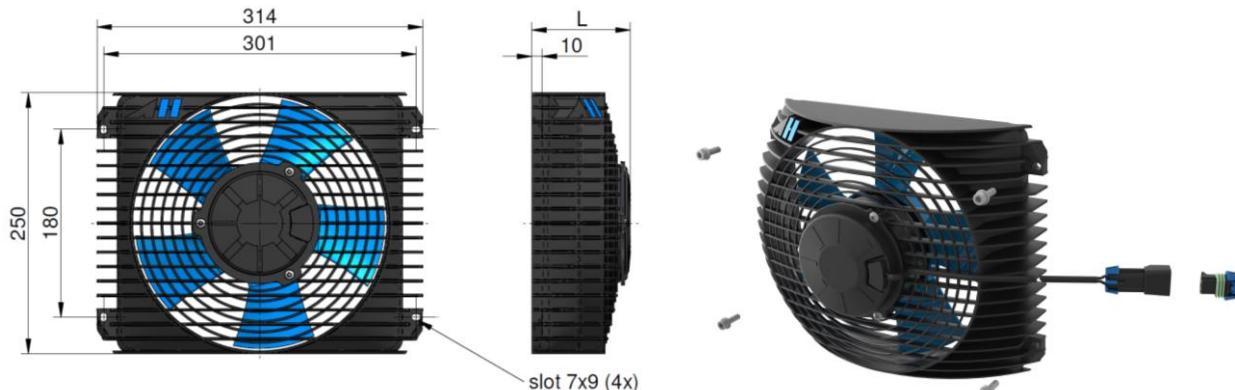


Technical Data ^{*)}

order number	description	current ^{**})	motor power	protection level	L	weight
		[A]	[kW]		[mm]	[kg]
ILLELE0240A1	fan kit 0240, TT 06, 12V	7,0	0,091	IP 68	93	1,53
ILLELE0240A2	fan kit 0240, TT 06, 24V	3,5	0,091	IP 68	93	1,53
ILLELE0240A3	fan kit 0240, TT 07, 12V	10	0,130	IP 68	93	2,03
ILLELE0240A4	fan kit 0240, TT 07, 24V	5	0,130	IP 68	93	2,03
ILLELE0240A5	fan kit 0240, TT 07 HP, 12V	14,6	0,190	IP 68	110	2,50
ILLELE0240A6	fan kit 0240, TT 07 HP, 24V	7,5	0,195	IP 68	110	2,50
ILLELE0240A5	fan kit 0240, TT 07 HP, 12V EMC	13,5	0,176	IP 68	110	2,50
ILLELE0240A6	fan kit 0240, TT 07 HP, 24V EMC	8,4	0,218	IP 68	110	2,50

^{**}) given data are running currents, free air flow, for start up higher currents have to be calculated!

Performance Data

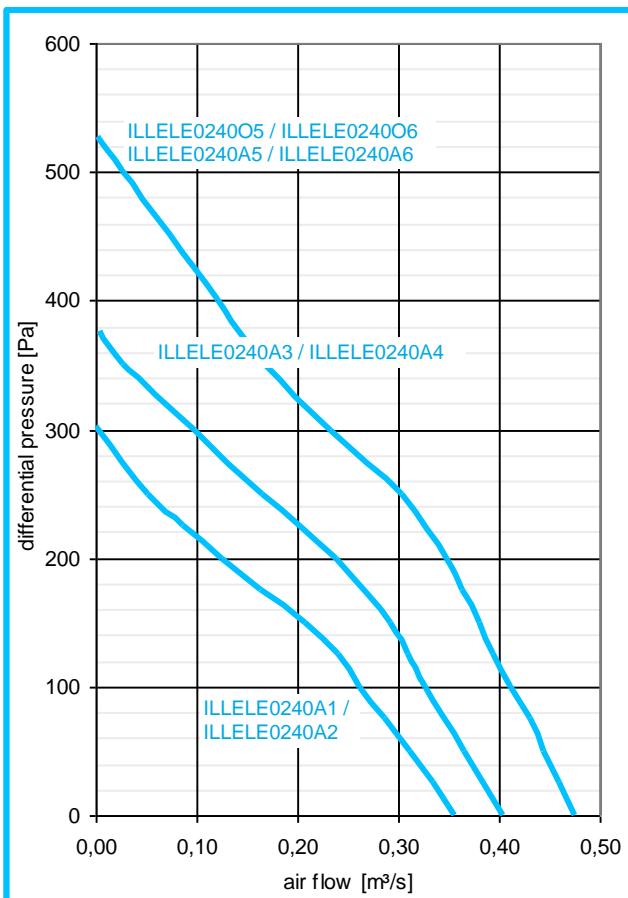

ambient conditions

ambient temperature range -20°C to +80°C

storage temperature range -40°C to +80°C

Important: Assure sufficient air circulation!

supply

12V DC ± 10% 24V DC ± 10%

maximum allowed ripple 1%

Check for right polarity! Inverse polarity may damage the fan!

recommended fuse (slow acting)

ILLELE0240A1 10 A

ILLELE0240A2 5 A

ILLELE0240A3 15 A

ILLELE0240A4 7,5 A

ILLELE0240O5 20 A

ILLELE0240O6 10 A

ILLELE0240A5 20 A

ILLELE0240A6 10 A

housing

material polyamide

accessories

temperature control ILLZTC12-2K
ILLZTC24-2K

content of fan kit

1x fan unit, 4x screws, 4x washer, 1x counter connector

^{*)} all data refer to tests with 13V and 26V DC, respectively

Please contact us for further options and assistance.